

INOSYS LBS DC IEC & UL

from 160 to 800 A
up to 1500 VDC

Ed. 2



When **energy** matters

socomec
Innovative Power Solutions



INOSYS LBS

Load Break Switches for DC & PV applications

from 160 to 800 A, up to 1500 VDC,
with manual operation and manual operation with tripping function

Load break switches



INOSYS LBS
2-poles with tripping function



INOSYS LBS
2-poles without tripping function

DC-PV2

The solution for

- Disconnection within PV installation
- Battery protection
- Rapid shutdown for firefighter safety
- Isolation of DC processes

Strong points

- High-performance switching in a compact frame
- Safe & reliable operation
- Tripping function
- Easy to install
- Modular solution
- Visible contact indication

Conformity to standards

- IEC 60947-3,
DC-21B & DC-PV2
- UL 98B



Compatible with requirements:

- IEC 60364-7-712
- NEC art. 690



Conformity to environment standards

- IEC 60947-1
Annex Q, Level F
- IEC 60068-2-1
- IEC 60068-2-2
- IEC 60068-2-27
- IEC 60068-2-30
- IEC 60068-2-52
- IEC 60068-2-6



Function

INOSYS LBS are load break switches which are available in manual operation or manual operation with integrated tripping function. They can be operated using the handle (manual and trip versions) or remotely via tripping coils (trip version) to disconnect all or part of electrical installation.

They make and break under all load conditions, provide safety isolation for any low voltage circuits up to 1500 VDC and are suitable for emergency switching. They are available for DC-PV2 utilization category.

Advantages

High-performance switching in a compact frame

INOSYS LBS switches integrate a patented technology that offers high switching capacity. 500 and 750 VDC per pole provides 1500 VDC in 2 poles only with optimum arc containment and significant power loss reduction - all within a compact device.

Safe & reliable operation

- Reliable position indication through visible contacts.
- The opening and closing of the switch is fully independent from the speed of operation, ensuring safe operation under all conditions.
- High temperature withstand: no derating up to 55°C (131°F), functional from -40 to +70°C.

Designed for harsh environments

- Vibration testing (from 13.2 to 100 Hz at 0.7 G).
- Shock testing (15 g during three cycles).
- Humid temperature testing (2 cycles, 55 °C with 95% humidity level).
- Salt mist testing (3 cycles with humidity storage, 40 °C, 93% humidity after each cycle).

Easy to install

- Wiring: as the switch is non-polarised all types of wiring and connections are possible.
- Easy access without tools to integrate auxiliary contacts and tripping coil (both located within the switch footprint).



Tripping function: flexible and robust

- Fully immune to external perturbation: no nuisance tripping.
- ON, OFF and TRIP positions are stable: resistant to voltage fluctuations.
- Trip position provides complete disconnection and isolation.
- Shunt-trip or undervoltage release from 24 to 220 VDC and from 24 to 230 VAC.
- Fast disconnection (<50 ms) for rapid firefighter shutdown, compliant with installation standards.





Modular solution for a flexible configuration

- Single or dual polarity switching


The same switch can be used for installation with either grounded or floating networks by choosing the wiring configuration.

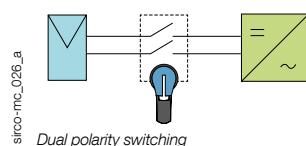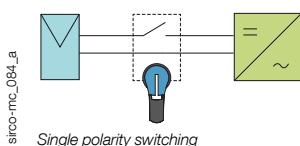

Typical applications: local and remote safe disconnection for DC and PV applications

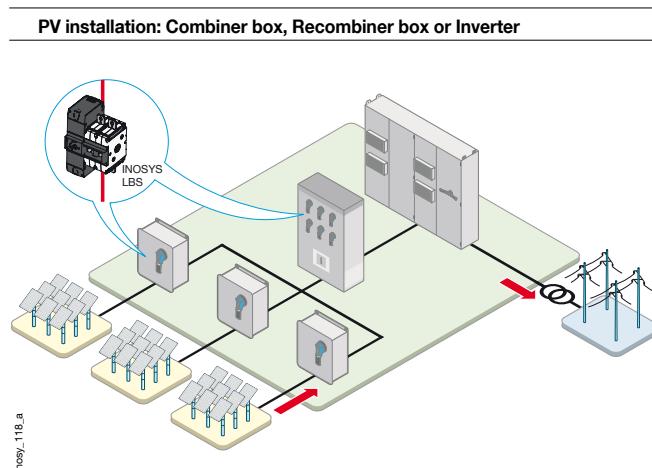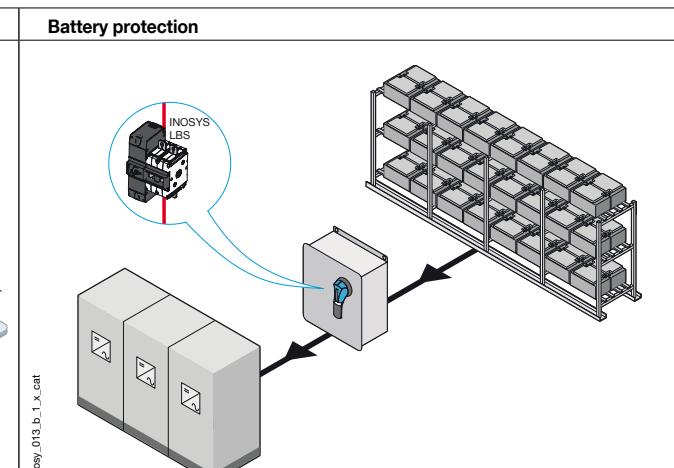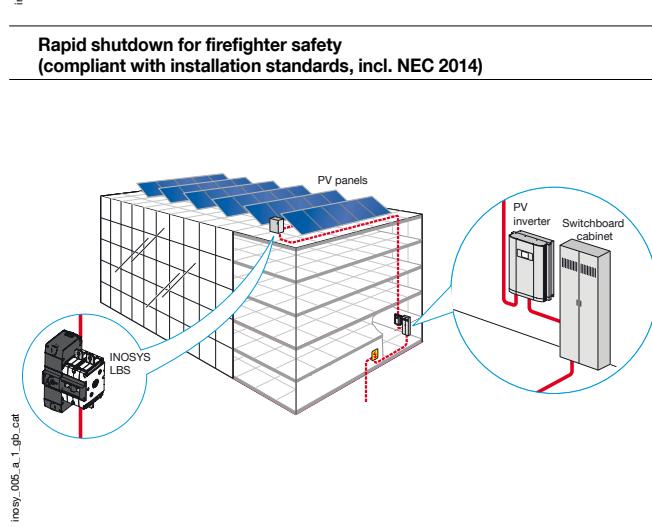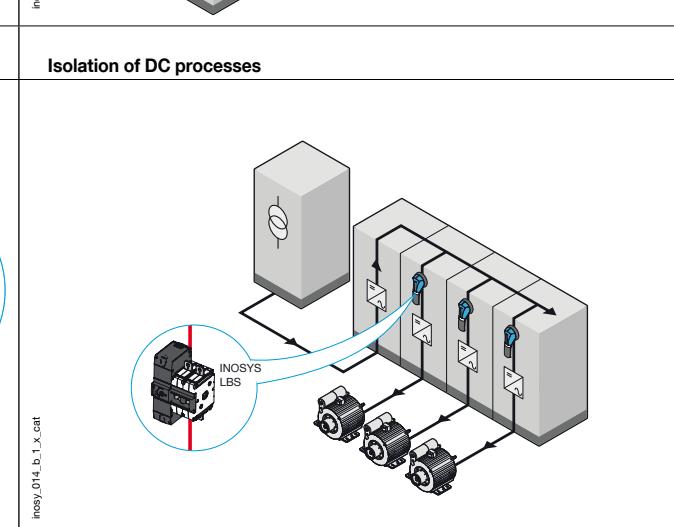PV installation: Combiner box, Recombiner box or Inverter	Battery protection
 inosy_118_a	 inosy_013_b_1_x_cat
Rapid shutdown for firefighter safety (compliant with installation standards, incl. NEC 2014)	Isolation of DC processes
 inosy_005_a_1_gb_cat	 inosy_014_b_1_x_cat

The SOCOMECH solutions

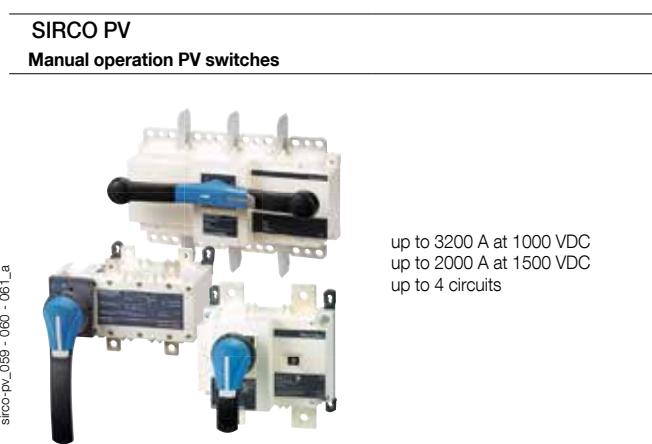SIRCO PV Manual operation PV switches	INOSYS LBS Up to 1500 VDC with visible contact indication - with or without tripping function
 sirco-pv_059 - 060 - 061_a	 inosy_140_a - inosy_152_a Up to 630A (IEC) and 500A (UL) at 1500 VDC


INOSYS LBS

Load Break Switches for DC & PV applications

from 160 to 800 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Overview

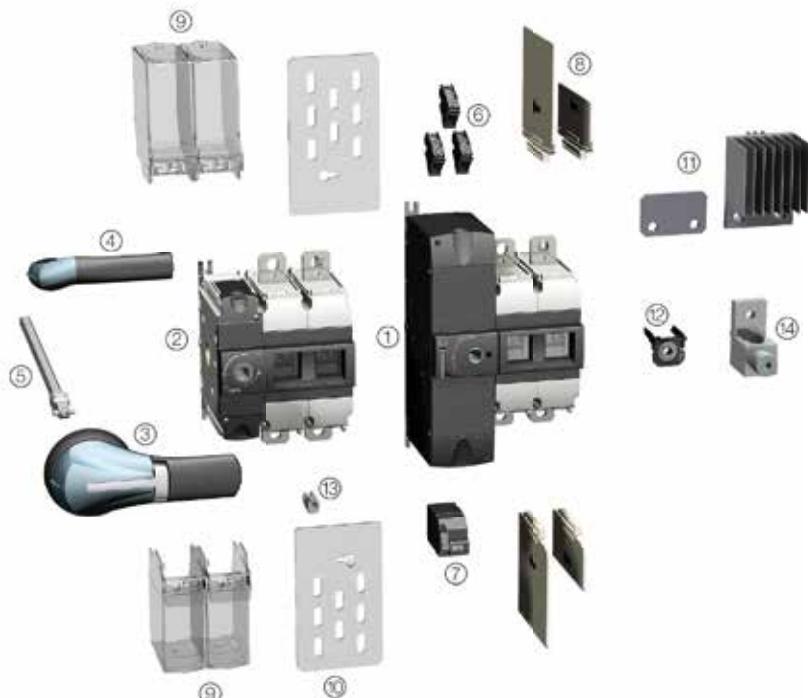

1. INOSYS LBS 400 A - 1000 VDC, with tripping function
2. INOSYS LBS 400 A - 1500 VDC, without tripping function
3. Door interlocked external operation handle
4. Direct operation handle
5. Shaft for external handle
6. Auxiliary contact
7. Tripping coil
8. Inter-phase barrier
9. Terminal shrouds
10. Terminal screens
11. Bridging bars for connection poles in series
12. Captive nut
13. Holding insert
14. Terminal lugs

References (continued)

INOSYS LBS without tripping function

1000 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Aux. Contact	Bridging Bar ⁽²⁾
160 A	F2	2 P (1 P+, 1 P-)	86P0 2016	Shaft 320 mm 1400 1032		
250 A	F2	2 P (1 P+, 1 P-)	86P0 2025	S2 type handle Black IP65 742F 2111		
315 A	F2	2 P (1 P+, 1 P-)	86P0 2031	Shaft 320 mm 1400 1032	NO/NC 8499 0001	-
400 A	F3	2 P (1 P+, 1 P-)	86P0 2040	S2L type handle Black IP65 14AF 2111		

(1) The switches are supplied without accessories.

(2) Please consult us

1500 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Aux. Contact	Bridging Bar ⁽²⁾
160 A	F2	2P (1P+, 1P-)	86P0 2017 ⁽⁴⁾	Shaft 320 mm 1400 1032		
			86P1 1017 ⁽³⁾⁽⁴⁾			
		3P (2P+, 1P-)	86P0 3016			8409 0016
			86P1 1026 ⁽³⁾⁽⁴⁾			
250 A	F2	2P (1P+, 1P-)	86P0 2026 ⁽⁴⁾	S2 type handle Black IP 65 742F 2111		
			86P1 1026 ⁽³⁾⁽⁴⁾			
		3P (2P+, 1P-)	86P0 3025			8409 0016
			86P1 1032 ⁽³⁾⁽⁴⁾		NO/NC 8499 0001	
315 A	F2	2P (1P+, 1P-)	86P0 2032 ⁽⁴⁾	Shaft 320 mm 1400 1032		
			86P1 1032 ⁽³⁾⁽⁴⁾			
		3P (2P+, 1P-)	86P0 3031			8409 0016
			86P1 1041 ⁽³⁾			
400 A	F3	2P (1P+, 1P-)	86P0 2041	S2L type handle Black IP 65 14AF 2111		
			86P1 1041 ⁽³⁾			
		2P (1P+, 1P-)	86P0 2064			
			86P1 1064 ⁽³⁾			
630 A	F3	2P (1P+, 1P-)				

1500 VDC - 2 circuits

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Aux. Contact	Bridging Bar ⁽²⁾
400 A	F3	2P (1P+, 1P-)	86P2 2041 ⁽³⁾	Shaft 320 mm 1400 1032		
630 A			86P2 2064 ⁽³⁾		NO/NC 8499 0001	

(1) The switches are supplied without accessories.

(2) For isolated networks.

(3) Centered mechanism.

(4) Availability Q4 2019.

INOSYS LBS

Load Break Switches for DC & PV applications

from 160 to 800 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

References

INOSYS LBS with tripping function

1000 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Tripping coil	Aux. Contact	Bridging Bar ⁽²⁾
160 A	F2	2 P (1 P+, 1 P-)	84P0 2016	Shaft 320 mm 1400 1032 S2 type handle Black IP65 742F 2118	Shunt trip coil 24 V AC/DC 8499 7002	NO/NC 8499 0001	-
250 A	F2		84P0 2025		48 V AC/DC 8499 7004		
315 A	F2		84P0 2031		230 V AC/DC 8499 7023		
400 A	F3		84P0 2040	Shaft 320 mm 1400 1032 S2L type handle Black IP65 74AF 2118	Undervoltage releases 48 VAC 8499 8104		
630 A	F3		84P0 2063		230 VAC 8499 8123		
800 A	F3		84P0 2080		24 VDC 8499 8202		
					48 VDC 8499 8204		

(1) The switches are supplied without accessories.

(2) Please consult us

1500 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Tripping coil	Aux. Contact	Bridging Bar ⁽²⁾
160A	F2	2P (1P+, 1P-)	84P0 2017 ⁽⁴⁾	Shaft 320 mm 1400 1032 S2 type handle Black IP65 742F 2118	Shunt trip coil 24 VAC/DC 8499 7002 48 VAC/DC 8499 7023 230 VAC/DC 8499 7023	NO/NC 8499 0001	-
			84P1 017 ⁽³⁾				
		3P (2P+, 1P-)	84P0 3016				
			84P1 1026 ⁽³⁾				
250A	F2	2P (1P+, 1P-)	84P0 2026 ⁽⁴⁾	Shaft 320 mm 1400 1032 S2 type handle Black IP 65 742F 2118	Undervoltage release 48 VAC 8499 8104 230 VAC 8499 8123 24 VDC 8499 8202	NO/NC 8499 0001	8409 0016
			84P1 1026 ⁽³⁾				
		3P (2P+, 1P-)	84P0 3025				
			84P0 3031				
315A	F2	2P (1P+, 1P-)	84P0 2032 ⁽⁴⁾	Shaft 320 mm 1400 1032 S2L type handle Black IP 65 74AF 2118	Undervoltage release 48 VAC 8499 8104 230 VAC 8499 8123 24 VDC 8499 8202	-	8409 0016
			84P1 1032 ⁽³⁾				
		3P (2P+, 1P-)	84P0 3031				
400A	F3	2P (1P+, 1P-)	84P0 2041	Shaft 320 mm 1400 1032 S2L type handle Black IP 65 74AF 2118	48 VDC 8499 8202	-	-
630A	F3	2P (1P+, 1P-)	84P0 2064				

(1) The switches are supplied without accessories

(2) For isolated networks

(3) Centered mechanism - consult us for availability

(4) Availability Q4 2019.

Accessories

Direct operation handle

For LBS with tripping function

Frame size	Handle type	Handle colour	Reference
F2 - F3	E3	Black	8499 5032



acces_400_a1_cat

For LBS without tripping function

Frame size	Handle type	Handle colour	Reference
F2	E2	Black	8499 5022
F2	E2	Red	8499 5023
F3	E3	Black	8499 5032

E2 type handle

Door interlocked external operation handle

Use

Door interlocked external operation handles include an escutcheon and are padlockable. External handles must be utilised with an extension shaft.

Note: We recommend to use IP55 for inside applications and IP65 for outside applications.

Example of application

As the handle is interlocked in the "ON" position the operator must safely disconnect and isolate the circuit prior to accessing the panel for maintenance procedures.

Opening the door when the switch is in the "ON" position can only be done by defeating the interlocking function with the use of a dedicated tool (authorised persons only). The interlocking function is restored when the door is re-closed.



acces_150.eps

For LBS with tripping function

Frame size	Handle type	Handle colour	Degree of protection	Front operation Reference
F2	S2	Black	IP55	7421 2118
F2	S2	Black	IP65	742F 2118
F2	S2	Red	IP65	742G 2118
F3	S2L ⁽¹⁾	Black	IP55	74A1 2118
F3	S2L ⁽¹⁾	Black	IP65	74AF 2118
F3	S2L ⁽¹⁾	Red	IP65	74AG 2118

(1) S2L handles have an extended grip; please refer to the dimensions section.

For LBS without tripping function

Frame size	Handle type	Handle colour	Degree of protection	Front operation Reference	Lateral operation Reference
F2	S2	Black	IP55	7421 2111	
F2	S2	Black	IP65	742F 2111	14YA 2111
F2	S2	Red	IP65	742G 2111	14YB 2111
F3	S2L ⁽¹⁾	Black	IP55	14A1 2111	
F3	S2L ⁽¹⁾	Black	IP65	14AF 2111	14AA 2111
F3	S2L ⁽¹⁾	Red	IP65	14AG 2111	14AB 2111

(1) S2L handles have an extended grip; please refer to the dimensions section.

INOSYS LBS

Load Break Switches for DC & PV applications

from 160 to 800 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Accessories (continued)

Shaft for external handle

Frame size	Handle type	Length (mm)	Reference
F2 - F3	S2, S2L	200	1400 1020
F2 - F3	S2, S2L	320	1400 1032
F2 - F3	S2, S2L	400	1400 1040

Other lengths: please consult us.



acces_401_a_1_cat

Shaft guide for external handle

Use

To guide the shaft extension into the external handle.

Recommend for a shaft length over 320 mm / 12.6 in.

This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm / 0.59 in.

Description	Reference
Shaft guide	1429 0000



acces_260_a_2_cat

Alternative S-type handle cover colours

Use

For S2 and S2L type single grip handles.

Handle colour	Handle type	To be ordered in multiples of	Reference
Light grey	S2, S2L	50	1401 0001
Dark grey	S2, S2L	50	1401 0011

Other colours: please consult us.



acces_198_a_1_cat

Auxiliary contact

Use

The same auxiliary contact can be used to provide position and tripping information. The function of the auxiliary contact depends on where it is mounted on the mechanism.

Characteristics

Changeover type: NO/NC, IP2X with front operation (cover tap screwed). 10 000 operations. Maximum 3 per switch.


Frame size	Connection type	Type	Reference
F2 - F3	Screw	NO/NC standard	8499 0001
F2 - F3	Screw	NO/NC low level	8499 0002
F2 - F3	Screw	NC > 600 V	8499 0003




acces_402_a_1_cat

Characteristics

Auxiliary contact type	Min. current (A)	I _{th} (A)	Operating current I _e (A)				
			DC-14	DC-14	AC-15	AC-15	AC-15
Standard	12.5 mA / 24 V	16	1	0.2	4	4	-
Low level	1 mA / 4 V	16	1	0.2	2	1	-
> 600 V	10 mA / 24 V	16	1	0.2	4	4	0.5

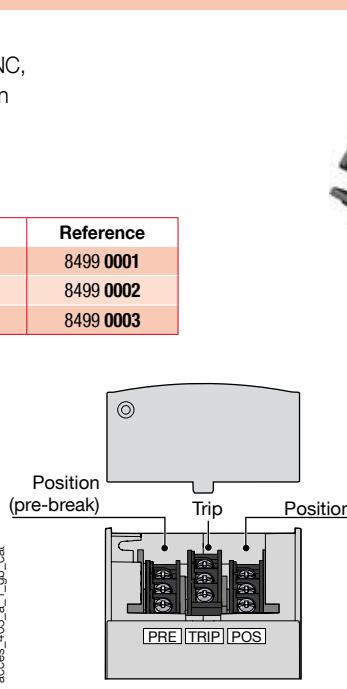

Switch with tripping function

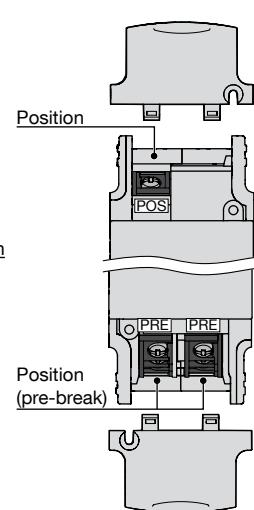

Switch without tripping function

Bridging bar for poles in series

Use

The bridging bars enable the poles to be connected in series, allowing the following configurations for 1500 VDC in 3 poles.

Connection diagrams,
see "Pole connection in series".
page 14.



acce_411_a_1_cat

(1) For insulated network (switching of both polarities + and -).

(2) Kit comprises 2 identical bridging bars.

Tripping coil

Use

Allows remote activation of the switch's tripping mechanism. Shunt trip and undervoltage release coils are available.

Connection: 1.5 mm², push in type.
Maximum one tripping coil per switch.
Safe and easy coil replacement by using standard tools.



acces_404_a_1_cat

Shunt trip coil

Frame size	Voltage (V)	Reference
F2 - F3	24 V AC/DC	8499 7002
F2 - F3	48 V AC/DC	8499 7004
F2 - F3	110 - 127 VAC ; 110 - 125 VDC	8499 7011
F2 - F3	230 V AC/DC	8499 7023

Other voltage ratings available, please consult us.

Undervoltage release

Frame size	Voltage (V)	Reference
F2 - F3	48 VAC	8499 8104
F2 - F3	110 - 120 VAC	8499 8111
F2 - F3	230 - 240 VAC	8499 8123
F2 - F3	24 VDC	8499 8202
F2 - F3	48 VDC	8499 8204

Other voltage ratings available, please consult us.

Characteristics

Shunt trip coils

AC type ($\pm 10\%$)	24 VAC	48 VAC	110 VAC	230 VAC
Inrush consumption (A); <10ms	6.85	2.95	1.25	0.73
DC type (-5% ... +20%)	24 VDC	48 VDC	110 VDC	230 VDC
Inrush consumption (A), <10ms	7.6	3.28	1.39	0.78

Max supply time 2 s.

Example to avoid permanent supply includes connection of auxiliary contact connected in series with shunt trip coil, or coil supply voltage to be taken from the load side, or electronic limitation of the duration of the supply voltage/current. For DC shunt trip coil rated above 70 VDC, external relay shall be used to disconnect the coil.

Undervoltage release

AC type	24 VAC	48 VAC	110 VAC	230 VAC
Max permanent consumption (VA), at 110% U _n	-	1.8	1.4	1.5
DC type	24 VDC	48 VDC	110 VDC	230 VDC
Max permanent consumption (VA), at 110% U _n	1.6	1.4	-	-

Holding: up to 85% x U_n

Release: < 35 to 70% x U_n

Inter-phase barrier

Use

Provides safety isolation between the terminals, essential for use at 1000 and 1500 VDC or between 2 circuits.

Frame size	Type	Pack (unit)	Reference
F2 - F3	Short	2	8499 2202
F2 - F3	Short	3	8499 2203
F2 - F3	Long	2	8499 2212
F2 - F3	Long	3	8499 2213



acces_405_a_1_cat acces_406_a_1_cat

INOSYS LBS

Load Break Switches for DC & PV applications

from 160 to 800 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Accessories (continued)


Terminal shroud

Use

For top or bottom protection against direct contact with terminals or connection parts; provides IP4 protection and phase separation. 1 P type to cover 1 pole connection.

Advantages

Perforations for thermographic inspection / voltage check without the need to remove the shrouds. Terminal shrouds can be fixed in place with a holding insert. Includes break-off tabs for precise adaptation to cables or insulated bars.

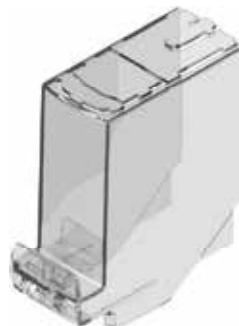

acces_407_a_1_cat

Frame size	Pack (unit)	No. of poles	Position	Reference
F2	3	1 P	Top or bottom	8499 4213 ⁽¹⁾
F2	4	1 P	Top or bottom	8499 4214 ⁽¹⁾
F3	3	1 P	Top or bottom	8499 4313 ⁽¹⁾
F3	4	1 P	Top or bottom	8499 4314 ⁽¹⁾

(1) Compatible with the holding insert which can be fitted to lock the shrouds in place.

Terminal screen

Use

Provides top and bottom protection against direct contact with terminals or connection parts.

Advantages

Perforations for thermographic inspection. Mounting requires holding inserts (supplied with the terminal screens).



acces_408_a_1_cat

Frame size	No. of poles	Position	Reference ⁽¹⁾
F2	2 P	Top and bottom	8499 3222
F2	3 P	Top and bottom	8499 3232
F3	2 P	Top and bottom	8499 3322

(1) Each reference comprises 2 terminal screens for top and bottom protection.

Holding insert

Use

Used to secure terminal shrouds / inter-phase barriers on the switch.

Frame size	Pack (unit)	Reference
F2 - F3	10	8499 6220
F2 - F3	100	8499 6221



acces_409_a_1_cat

Captive nut

Use

This accessory enables simple one-sided connection to the power terminals. It can be mounted on either side of the terminal for front or rear connection.



acce_399_a1_cat

Frame size	Pack (unit)	Reference
F2	12	8499 6120
F2	120	8499 6121
F3	12	8499 6130
F3	120	8499 6131

Voltage tap

Use

Allows connection of voltage sensing or power cables, with fast-on connection.



acce_412_a1_cat

Frame size	Pack (unit)	Reference
F2	12	8499 9012
F3	12	8499 9013

Characteristics

Characteristics according to IEC 60947-3

Rated current I_n			160 A	250 A	315 A	400 A	630 A	800 A
Frame size			F2	F2	F2	F3	F3	F3
Thermal current at 40°C (A)			160	250	315	400	630	800
Thermal current at 50°C (A)			160	250	315	400	630	760
Thermal current at 60°C (A)			160	250	315	400	570	685
Rated insulation voltage U (V)			1500	1500	1500	1500	1500	1500
Rated impulse withstand voltage U_{imp} (kV)			12	12	12	12	12	12
Number of circuits	Rated voltage	Utilisation category	I_e (A)	I_e (A)	I_e (A)	I_e (A)	I_e (A)	I_e (A)
1 circuit	1000 VDC ⁽¹⁾	DC-21 B	160	250	315	400	630	800
1 circuit	1500 VDC ⁽²⁾	DC-21 B	160	250	315	400	630	-
Number of circuits	Rated voltage	Utilisation category	I_e (A)	I_e (A)	I_e (A)	I_e (A)	I_e (A)	I_e (A)
1 circuit	1000 VDC ⁽¹⁾	PV2	-	-	-	-	-	-
1 circuit	1500 VDC ⁽²⁾	PV2	160	250	315	400	630	-
2 circuits	1500 VDC ⁽²⁾	PV2	-	-	-	400	630	-
Short-circuit capacity at 1000 & 1500VDC (without protection)								
Rated short-time withstand current I_{cw} 1s (kA eff.)			5	5	5	8	8	8
Rated short-circuit making capacity I_{cm} (kA peak) - 60 ms			10	10	10	10	10	10
Connection								
Recommended Cu rigid cable cross-section (mm ²) ⁽³⁾			70	120	185	240	2X 185	2X 240
Recommended Cu busbar width (mm) ⁽³⁾			20	20	20	25	25	25
Mechanical characteristics								
Durability (number of operating cycles)			8000	8000	8000	8000 / 6000 ⁽⁴⁾	8000 / 6000 ⁽⁴⁾	8000 / 6000 ⁽⁴⁾
Number of tripping operations			1000	1000	1000	1000	1000	1000
Power loss/pole (W/Pole)			4.5	11.2	13	13	30.2	50

(1) 2 poles in series.

(2) 2 or 3 poles in series.

(3) For aluminium connection, please consult us.

(4) 8000 for LBS without tripping function and 6000 for LBS with tripping function.


INOSYS LBS

Load Break Switches for DC & PV applications


from 160 to 800 A, up to 1500 VDC,

with manual operation and manual operation with tripping function


INOSYS LBS without tripping function

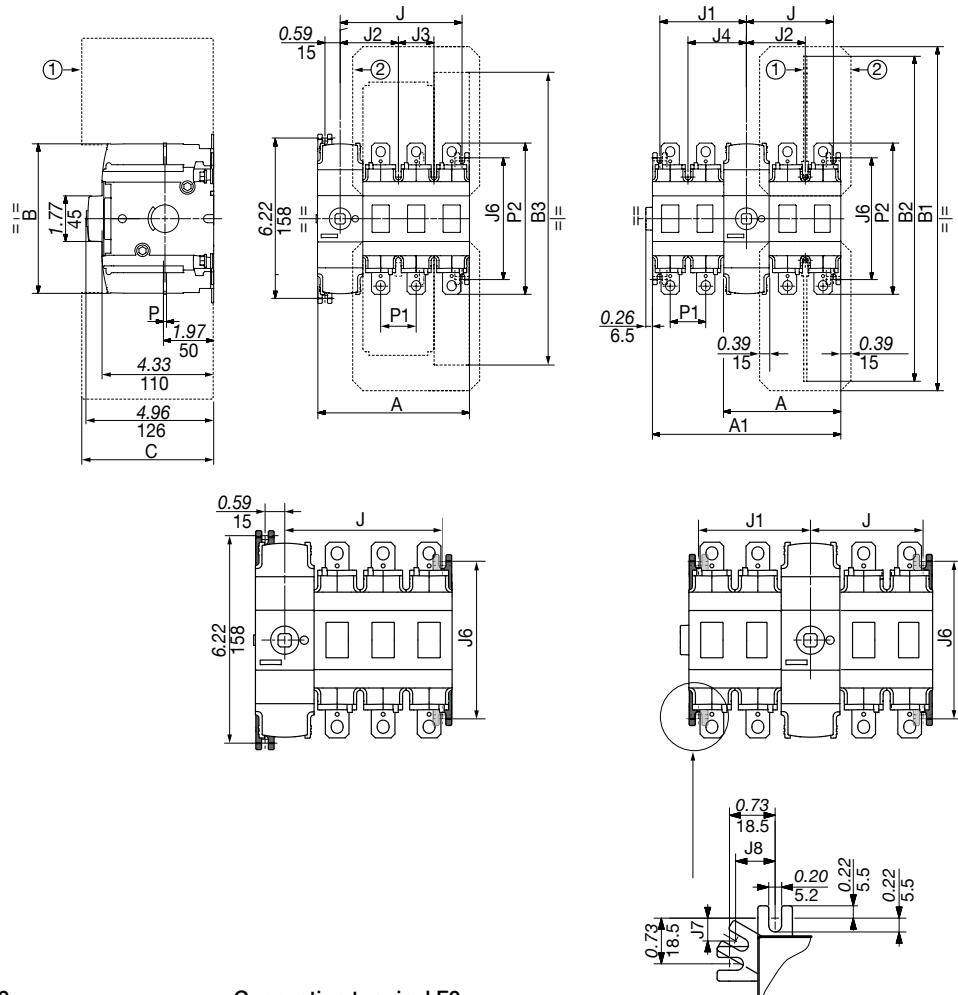

Connection terminal F2



Connection terminal F3




Rating (A)	Frame size	Units	A		A1		J		J1		J	
			2 P	3 P	1+1 P / 2+2 P	1+1 P / 2+2 P	1+1 P / 2+2 P	2 P	3 P	2 P	3 P	
160 ... 315	F2	in	4.60	5.98	4.60 / 7.36	1.97 / 3.37	2.05 / 3.44	3.35	4.72	2.05 / 3.44	85.5	
		mm	117	152	117 / 187	50.5 / 85.5	52.5 / 87.5	85.5	120.5			
400	F3	in	5.40	7.17	5.40 / 8.94	2.36 / 4.15	2.44 / 4.23	4.13	-	62.5 / 107.5	105.5	
		mm	137	182	137 / 227	60.5 / 105.5	62.5 / 107.5	105.5	-			

Rating (A)	Frame size	Units	B	B1	B2		B3	C	IEC	UL	J2	J3	J4	J6	P1	P2
					IEC short	IEC long	UL									
160 ... 315	F2	in	5.90	13.35	7.85	12.61	10.31	11.64	4.33	4.33	2.26	1.38	2.34	4.72	1.38	5.87
		mm	154	339	199	320	262	296	110	110	57,5	35	59,5	120	35	149
400	F3	in	5.90	16.28	9.35	14.11	15.5	14.12	4.33	5.31	2.64	1.77	2.72	6.22	1.77	7.87
		mm	154	414	237	358	394	359	110	135	67,5	45	69,5	158	45	200


Dimensions (in/mm)

INOSYS LBS with tripping function

inosy_119_b_1_x_cat.ai

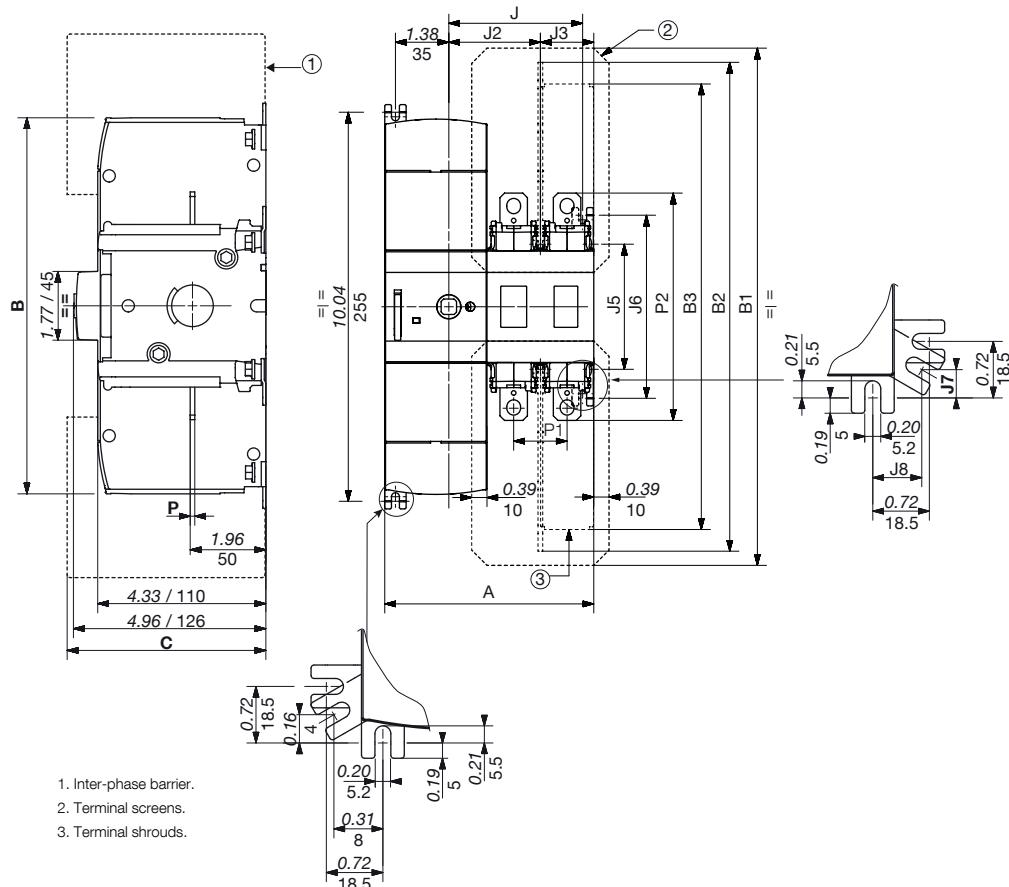


Connection terminal F2




inosy_132_a_1_x_cat.ai

Connection terminal F3

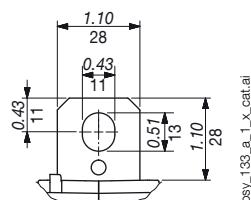

inosy_133_a_1_x_cat.ai

Parallel bridging F3

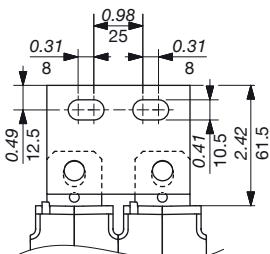

inosy_134_a_1_x_cat.ai

Rating (A)	Frame size	Units
160 ... 315	F2	in
		mm
400 ... 800	F3	in
		mm

Rating (A)	Frame size	Units	A														
			2 P	3 P	B	B1	short	long	B2	C	J2	J3	J4	J5	J6	P	P2
160 ... 315	F2	in	5.39	6.77	9.69	13.35	7.85	12.61	11.64	4.33	2.36	1.38	3.03	3.23	4.72	0.12	5.87
		mm	137	172	246	339	199	320	296	110	60	35	77	82	120	3	149
400 ... 800	F3	in	6.18	-	9.69	16.28	9.35	14.11	14.12	4.33	2.76	1.77	3.43	4.72	6.22	0.20	7.87
		mm	157	-	246	414	237	358	359	110	70	45	87	120	158	5	200

INOSYS LBS





Load Break Switches for DC & PV applications

from 160 to 800 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Dimensions for external handles (in/mm)





F2 frame size

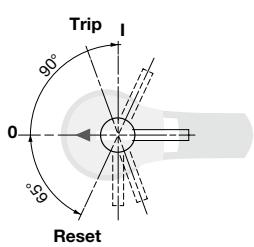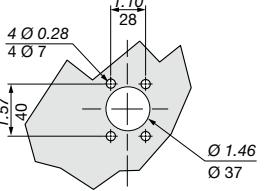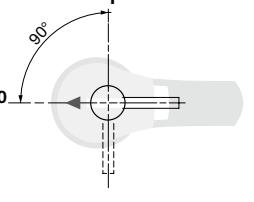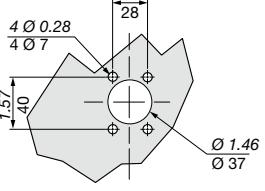Handle type	Front operation Direction of operation	Door drilling
S2 type with trip		
S2 type		

poign_067_b_1_us_cat.eps

poign_013_b_1_us_cat.eps

F3 frame size

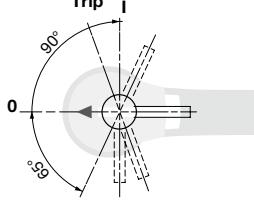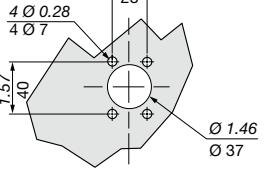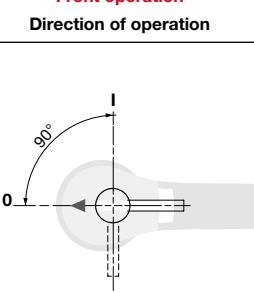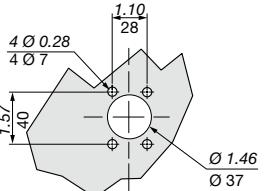Handle type	Front operation Direction of operation	Door drilling
S2L type with trip		
S2L type		


poign_068_b_1_us_cat.eps

poign_069_b_1_us_cat.eps

Pole connections in series

1 PV circuit - 1000 VDC


F2-F3 - 2 P

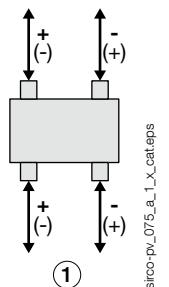

1. Circuit 1


1 PV circuit - 1500 VDC

F2 - 3 P

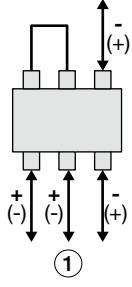


2 PV circuit - 1500 VDC

F2-F3 - 2 P

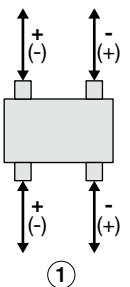

F3 - 2 P

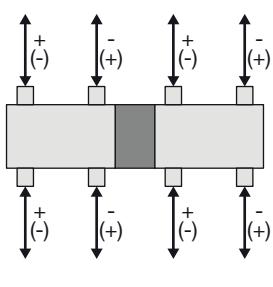


Bridging bars (in/mm)

F2

8409 0016⁽¹⁾


(1) Kit comprises 2 identical bars.

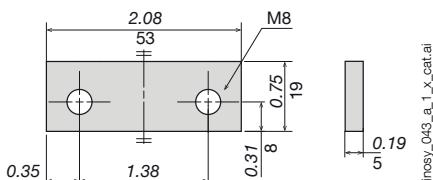

Mounting orientation

F2 - F3

All mounting orientations are possible. Derating may apply - please consult us.



inosy_006_apsd



INOSYS LBS UL 98B

Load Break Switches for DC & PV applications

from 100 to 600 A, up to 1500 VDC,
with manual operation and manual operation with tripping function

Load break switches



INOSYS LBS
2-poles with tripping function



INOSYS LBS
2-poles without tripping function

Function

INOSYS LBS are load break switches which are available in manual operation or manual operation with integrated tripping function. They can be operated using the handle (manual and trip versions) or remotely via tripping coils (trip version) to disconnect all or part of electrical installation.

They make and break under all load conditions, provide safety isolation for any low voltage circuits up to 1500 VDC and are suitable for emergency switching. They are available for DC-PV2 utilization category.

Advantages

High-performance switching in a compact frame

INOSYS LBS switches integrate a patented technology that offers high switching capacity. 500 and 750 VDC per pole provides 1500 VDC in 2 poles only with optimum arc containment and significant power loss reduction - all within a compact device.

Safe & reliable operation

- Reliable position indication through visible contacts.
- The opening and closing of the switch is fully independent from the speed of operation, ensuring safe operation under all conditions.
- High temperature withstand: no derating up to 55 °C (131 °F), functional from -40 to +122 °F (-40 to +50 °C).

Designed for harsh environments

- Vibration testing (from 13.2 to 100 Hz at 0.7 g).
- Choc testing (15 g during three cycles).
- Humid temperature testing (2 cycles, 55 °C/131 °F with 95% humidity level).
- Salt mist testing (3 cycles with humidity storage, 40 °C/104 °F, 93% humidity after each cycle).

Easy to install

- Wiring: as the switch is non-polarised all types of wiring and connections are possible.
- Easy access without tools to integrate auxiliary contacts and tripping coil (both located within the switch footprint).
- Mechanism can be centred or left aligned (in the factory) to accommodate installation requirements.

Tripping function: flexible and robust

- Fully immune to external perturbation: no nuisance tripping.
- ON, OFF and TRIP positions are stable: resistant to voltage fluctuations.
- Trip position provides complete disconnection and isolation.
- Shunt-trip or undervoltage release from 24 to 220 VDC and from 24 to 230 VAC.
- Fast disconnection (<50 ms) for rapid firefighter shutdown, compliant with installation standards.
- Compatible with virtually any Arc-Fault Detection System.

The solution for

- Disconnection within PV installation
- Battery protection
- Rapid shutdown for firefighter safety
- Isolation of DC processes

Strong points

- High-performance switching in a compact frame
- Safe & reliable operation
- Tripping function
- Easy to install
- Modular solution
- Visible contact indication

Conformity to standards

- IEC 60947-3,
DC-21B & DC-PV2
- UL 98B





Compatible with requirements:

- IEC 60364-7-712
- NEC art. 690







Modular solution for a flexible configuration

- Single or dual polarity switching
The same switch can be used for installation with either grounded or floating networks by choosing the wiring configuration.

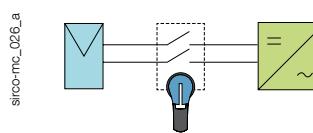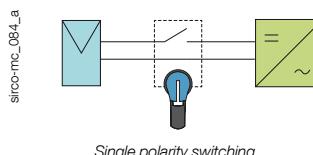

Typical applications: local and remote safe disconnection for DC and PV applications

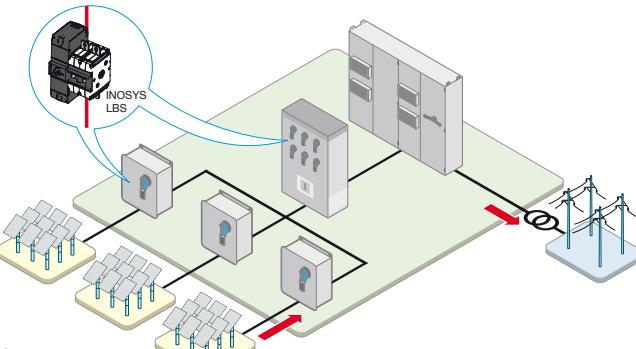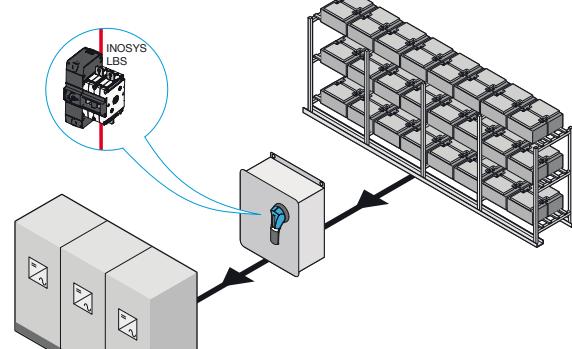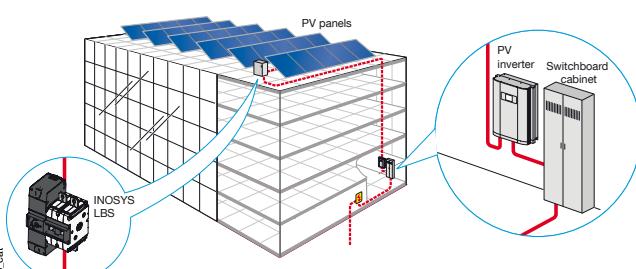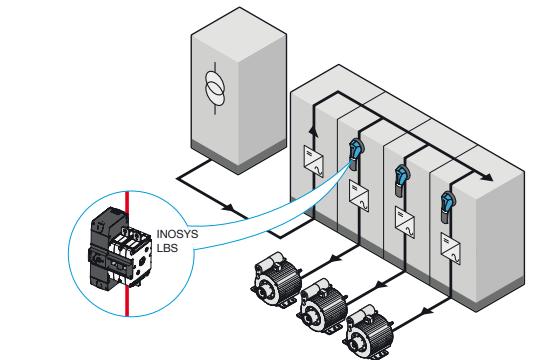PV installation: Combiner box, Recombiner box or Inverter  <p>inosy_118_a</p>	Battery protection  <p>inosy_013_L_1_X_cat</p>
Rapid shutdown for firefighter safety (compliant with installation standards, incl. NEC 2014)  <p>inosy_005_a_1_gb_cat</p>	Isolation of DC processes  <p>inosy_014_b_1_X_cat</p>

The SOCOMEC solutions

SIRCO PV Manual operation PV switches  <p>up to 3200 A at 1000 VDC up to 2000 A at 1500 VDC up to 4 circuits</p> <p>sirco-pv_059 - 060 - 061_a</p>	INOSYS LBS Up to 1500 VDC with visible contact indication - with or without tripping function  <p>up to 600 A at 1000 VDC up to 500 A at 1500 VDC</p> <p>inosy_140_a - inosy_152_a</p>
---	--


INOSYS LBS UL 98B

Load Break Switches for DC & PV applications

from 100 to 600 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Overview

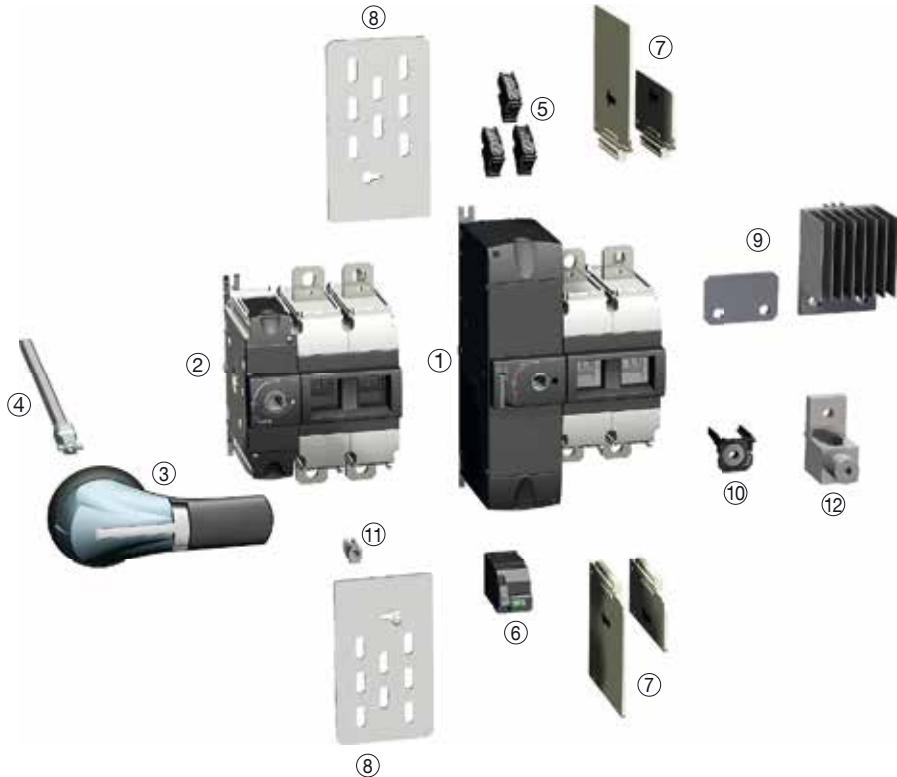

1. INOSYS LBS 400 A - 1000 VDC with tripping function
2. INOSYS LBS 400 A - 1500 VDC without tripping function
3. Door interlocked external operation handle
4. Shaft for external handle
5. Auxiliary contact
6. Tripping coil
7. Inter-phase barrier (shipped with the switches)
8. Terminal screens
9. Bridging bars for connecting poles in series
10. Captive nut
11. Holding insert
12. Terminal lugs

References (continued)

INOSYS LBS without tripping function

1000 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Aux. Contact	Bridging Bar ⁽²⁾
100 A	F2	2 P	87P0 2010	Shaft 320 mm 12.6 inches 1400 1032 S2 type handle Black 3R, 12 - 4,4X 742D 2111	NO/NC 8499 0001	8409 0016
250 A	F2	2 P	87P0 2025			
400 A	F3	2 P	87P0 2040			8409 0040
500 A	F3	2 P	87P0 2050			8409 0041

(1) The switches are supplied without accessories.

(2) For grounded network, single polarity switching.

1500 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Aux. Contact	Bridging Bar ⁽²⁾
100 A	F2	2 P (1 P+, 1 P-)	87P0 2011 ⁽⁵⁾ 87P1 1011 ⁽³⁾⁽⁵⁾	Shaft 320 mm 12.6 inches 1400 1032 S2 type handle Black 3R, 12 - 4, 4X 742D 2111	NO/NC 8499 0001	8409 0016
200 A	F2	2 P (1 P+, 1 P-)	87P0 2021 ⁽⁵⁾ 87P1 1021 ⁽³⁾⁽⁵⁾			8409 0024
250 A	F2	2 P (1 P+, 1 P-)	87P0 2026 ⁽⁵⁾ 87P1 1026 ⁽³⁾⁽⁵⁾			8409 0016
		3 P (2 P+, 1 P-)	87P0 3025			8409 0024
400 A	F3	2 P (1 P+, 1 P-)	87P0 2041 87P1 1041 ⁽³⁾	Shaft 320 mm 12.6 inches 1400 1032 S2L type handle Black 3R, 12 - 4, 4X 14AD 2111	2x NO/NC 8499 0001	8409 0040
			87P0 2051			8409 0039
500 A	F3	2 P (1 P+, 1 P-)	87P1 1051 ⁽³⁾			8409 0041
						8409 0039

1500 VDC - 2 circuits

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Aux. Contact	Bridging Bar ⁽²⁾
400 A	F3	2 P (1 P+, 1 P-)	87P2 2041 ⁽³⁾	Shaft 320 mm 12.6 inches 1400 1032 S2L type handle Black 3R, 12 - 4, 4X 14AD 2111	NO/NC 8499 0001	8409 0041 8409 0063⁽⁴⁾
500 A			87P2 2051 ⁽³⁾			8409 0063

(1) The switches are supplied without accessories.

(2) For isolated networks.

(3) Centered mechanism.

(4) In side mounting.

(5) Availability Q4 2019.

INOSYS LBS UL 98B

Load Break Switches for DC & PV applications

from 100 to 600 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

References

INOSYS LBS with tripping function

1000 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Tripping coil	Aux. Contact	Bridging Bar ⁽²⁾
100 A	F2	2 P	85P0 2010	Shaft 320 mm 12.6 inches 1400 1032	Shunt trip coil	NO/NC 8499 0001	8409 0016
250 A	F2	2 P		S2 type handle Black 3R,12 - 4,4X 742D 2118	24 V AC/DC 8499 7002 48 V AC/DC 8499 7004		
400 A	F3	2 P	85P0 2040	Shaft 320 mm 12.6 inches 1400 1032	Undervoltage releases	8499 0040	8409 0041
500 A	F3	2 P			48 V AC 8499 8104 230 V AC 8499 8123 24 V DC 8499 8202		
600 A	F3	2 P	85P0 2060	S2L type handle Black 3R,12 - 4,4X 74AD 2118	48 V DC 8499 8204		8409 0063

(1) The switches are supplied without accessories.

(2) For grounded network, single polarity switching.

1500 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body ⁽¹⁾	External operation	Tripping coil	Aux. Contact	Bridging Bar ⁽²⁾
100 A	F2	2P (1P+, 1P-)	85P0 2011 ⁽⁴⁾ 85P1 1011 ⁽³⁾	Shaft 320 mm 12.6 inches 1400 1032	Shunt trip coil 24 VAC/DC 8499 7002 48 VAC/DC 8499 7023	NO/NC 8499 0001	8409 0016
200 A	F2	2P (1P+, 1P-)					8409 0016
250 A	F2	2P (1P+, 1P-)	85P0 2026 ⁽⁴⁾ 85P1 1026 ⁽³⁾	S2 type handle Black 3R, 12 - 4, 4X 742D 2118	230 VAC/DC 8499 7023 Undervoltage release 48 VAC 8499 8104	2x 8499 0025	8409 0016
		3P (2P+, 1P-)					8409 0025
400 A	F3	2P (1P+, 1P-)	85P0 2041	Shaft 320 mm 12.6 inches 1400 1032	230 VAC 8499 8123 24 VDC 8499 8202		8409 0040
500 A	F3	2P (1P+, 1P-)	85P0 2051	S2L type handle Black 3R, 12 - 4, 4X 74AD 2118	48 VDC 8499 8202		8409 0041

(1) The switches are supplied without accessories.

(2) For isolated networks.

(3) Centered mechanism - Consult us for availability.

(4) Availability Q4 2019.

Accessories

Door interlocked external operation handle

Use

Door interlocked external operation handles include an escutcheon and are padlockable. External handles must be utilised with an extension shaft.

Example

As the handle is interlocked in the "ON" position the operator must safely disconnect and isolate the circuit prior to accessing the panel for maintenance procedures.

Opening the door when the switch is in the "ON" position can only be done by defeating the interlocking function with the use of a dedicated tool (authorised persons only). The interlocking function is restored when the door is re-closed.



access_150.eps

S2 type handle

For LBS with tripping function

Frame size	Handle type	Handle colour	Degree of protection	Front operation	
				Reference	
F2	S2	Black	3R,12	742F 2118	
F2	S2	Black	4,4X	742D 2118	
F2	S2	Red	4,4X	742E 2118	
F3	S2L ⁽¹⁾	Black	3R,12	74AF 2118	
F3	S2L ⁽¹⁾	Black	4,4X	74AD 2118	
F3	S2L ⁽¹⁾	Red	4,4X	74AE 2118	

(1) S2L handles have an extended grip; please refer to the dimensions section.

For LBS without tripping function

Frame size	Handle type	Handle colour	Degree of protection	Front operation	
				Reference	Lateral operation
F2	S2	Black	3R,12	742F 2111	
F2	S2	Black	4,4X	742D 2111	142J 6111
F2	S2	Red	4,4X	742E 2111	
F3	S2L ⁽¹⁾	Black	3R,12	14AF 2111	
F3	S2L ⁽¹⁾	Black	4,4X	14AD 2111	14AJ 2111
F3	S2L ⁽¹⁾	Red	4,4X	14AE 2111	

(1) S2L handles have an extended grip; please refer to the dimensions section.

Shaft for external handle

Frame size	Handle type	Length (mm)	Reference
F2 - F3	S2, S2L	200	1400 1020
F2 - F3	S2, S2L	320	1400 1032
F2 - F3	S2, S2L	400	1400 1040

Other lengths: please consult us.

Shaft for S2 and S2L type handle



acces_401_a_1_cat

INOSYS LBS UL 98B

Load Break Switches for DC & PV applications

from 100 to 600 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Auxiliary contact

Use

The same auxiliary contact can be used to provide position and tripping information.

The function of the auxiliary contact depends on where it is mounted on the mechanism.


Characteristics

Changeover type: NO/NC,
IP2X with front operation
(cover tap screwed).
10 000 operations.
Maximum 3 per switch.

Frame size	Connection type	Type	Reference
F2 - F3	Screw	NO/NC standard	8499 0001
F2 - F3	Screw	NO/NC low level	8499 0002
F2 - F3	Screw	NC > 600 V	8499 0003

Characteristics

Auxiliary contact type	Min. current (A)	I _{th} (A)	Electrical characteristics per UL 60947-5-1
Standard	12.5 mA / 24 V	10	A300 - R300 - Q150
Low level	1 mA / 4 V	10	A300 - R300 - Q150
> 600 V	10 mA / 24 V	10	A600

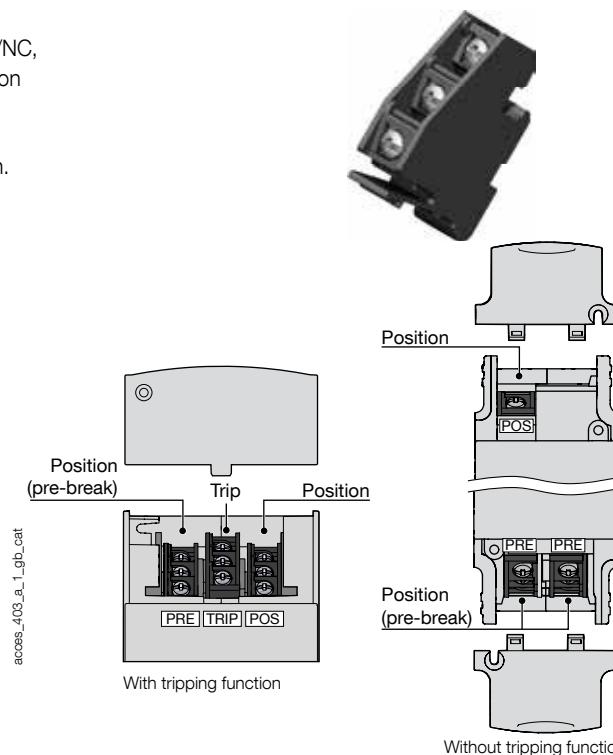

Tripping coil

Use

Allows remote activation of the switch's tripping mechanism. Shunt trip and undervoltage release coils are available.

Connection: 1.5 mm², push in type.

Maximum one tripping coil per switch.

Safe and easy coil replacement by using standard tools.



acces_404_a_1_cat

Shunt trip coil

Frame size	Voltage (V)	Reference
F2 - F3	24 V AC/DC	8499 7002
F2 - F3	48 V AC/DC	8499 7004
F2 - F3	110 - 127 VAC ; 110 - 125 VDC	8499 7011
F2 - F3	230 V AC/DC	8499 7023

Other voltage ratings available, please consult us.

Undervoltage release

Frame size	Voltage (V)	Reference
F2 - F3	48 VAC	8499 8104
F2 - F3	110 - 120 VAC	8499 8111
F2 - F3	230 - 240 VAC	8499 8123
F2 - F3	24 VDC	8499 8202
F2 - F3	48 VDC	8499 8204

Other voltage ratings available, please consult us.

Characteristics

Shunt trip coils

AC type ($\pm 10\%$)	24 VAC	48 VAC	110 VAC	230 VAC
Inrush consumption (A); <10ms	6.85	2.95	1.25	0.73
DC type (-5% ... +20%)	24 VDC	48 VDC	110 VDC	230 VDC
Inrush consumption (A), <10ms	7.6	3.28	1.39	0.78

Max supply time 2 s.

Example to avoid permanent supply includes connection of auxiliary contact connected in series with shunt trip coil, or coil supply voltage to be taken from the load side, or electronic limitation of the duration of the supply voltage/current.

For DC shunt trip coil rated above 70 VDC, external relay shall be used to disconnect the coil.

Undervoltage release

AC type	24 VAC	48 VAC	110 VAC	230 VAC
Max permanent consumption (VA), at 110% U _n	-	1.8	1.4	1.5
DC type	24 VDC	48 VDC	110 VDC	230 VDC

Max permanent consumption (VA), at 110% U_n


Accessories (continued)

Bridging bar for poles in series

Use

The bridging bars enable the poles to be connected in series, allowing the following configurations for 1500 VDC.

Connection diagrams,
see "Pole series connection" pages.
page 29.

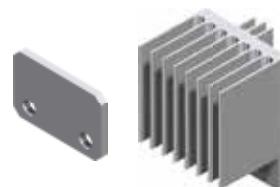

acce_411_a_1_cat

1000 VDC - 1 circuit

Frame size	Rating (A)	No. of poles	Quantity to be ordered	Reference
F2	100	2 P	1	8409 0016
F2	250	2 P	1	8409 0016
F3	400	2 P	1	8409 0040
F3	500	2 P	1	8409 0041
F3	600	2 P	1	8409 0063

1500 VDC - 1 circuit

Frame Size	Rating (A)	No. of poles	Quantity to be ordered	Reference
F2	100	3 P	2	8409 0016
F2	100 ... 250	2 P	1	8409 0024 ⁽¹⁾
F2	250	3 P	2	8409 0025
F3	400 ... 500	2 P	1	8409 0039 ⁽¹⁾
F3	400	2 P	1	8409 0040
F3	500	2 P	1	8409 0041 8409 0063 ⁽²⁾

1500 VDC - 2 circuits

Frame Size	Rating (A)	No. of poles	Quantity to be ordered	Reference
F3	400	2 P	2	8409 0041 8409 0063 ⁽²⁾
F3	500	2 P	2	8409 0063

(1) Centered mechanism.

(2) In side mounting.

Terminal screen

Use

Provides top and bottom protection against direct contact with terminals or connection parts.

Advantages

Perforations for thermographic inspection.
Mounting requires holding inserts (supplied with the terminal screens).



acce_408_a_1_cat

Frame size	No. of poles	Position	Reference ⁽¹⁾
F2	2 P	Top and bottom	8499 3222
F2	3 P	Top and bottom	8499 3232
F3	2 P	Top and bottom	8499 3722

(1) Each reference comprises 2 terminal screens for top and bottom protection.

Holding insert

Use

Used to secure terminal shrouds / inter-phase barriers on the switch.

Frame size	Pack (unit)	Reference
F2 - F3	10	8499 6220
F2 - F3	100	8499 6221



acce_409_a_1_cat

INOSYS LBS UL 98B

Load Break Switches for DC & PV applications

from 100 to 600 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Captive nut

Use

This accessory enables simple one-handed connection to the power terminals. It can be mounted on either side of the terminal for front or rear connection.

Frame size	Pack (unit)	Reference
F2	12	8499 6120
F2	120	8499 6121
F3	12	8499 6130
F3	120	8499 6131



acce_399_a1_cat

Voltage tap

Use



Allows connection of voltage sensing or power cables, with fast-on connection.

Frame size	Pack (unit)	Reference
F2	12	8499 9012
F3	12	8499 9013



acce_412_a1_cat

Terminal lugs

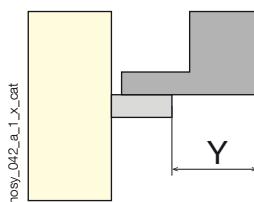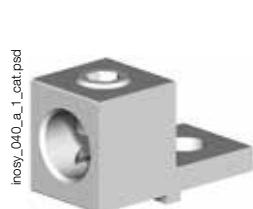

Version	Frame size	Number and size (min. - max.) of cables	Type of cable	Openings per lug	Quantity per reference	Dimension "Y" (mm/in)	Type	Reference ⁽¹⁾
With tripping function only	F2	1 conductor (#6 - 300 KCMIL)	Cu / Al	1	2	33,4 / 1.31	CMC LA300-R	3954 2020
	F2		Cu / Al		3			3954 3020
	F2		Cu / Al		4			3954 4020
	F2		Cu / Al		6			3954 6020
With and without tripping function	F2	2 conductors (#12 - 2/0)	Cu / Al	2	2	32,5 / 1.29	IHI 2S2-0-TP-STK-34-49-HEX	3954 2023 ⁽²⁾
	F2		Cu / Al		3			3954 3023 ⁽²⁾
	F2		Cu / Al		4			3954 4023 ⁽²⁾
	F3	1 conductor (#4 - 600 KCMIL) 2 conductors (#1/0 - 250 KCMIL)	Cu / Al	1 2	2	45,7 / 1.79	CMC LA630-R	3954 2040 ⁽²⁾
With tripping function only	F3		Cu / Al		3			3954 3040 ⁽²⁾
	F3		Cu / Al		4			3954 4040 ⁽²⁾
	F3		Cu / Al		2			3954 2060 ⁽²⁾
With and without tripping function	F3	2 conductors (#2 - 600 KCMIL)	Cu / Al	2	3	69,7 / 2.74	CMC PV2-600	3954 3060 ⁽²⁾
	F3		Cu / Al		4			3954 4060 ⁽²⁾

(1) Interphase barriers must be installed on the products.

(2) Captive nut 84996xxx is mandatory.

Characteristics

Characteristics according to UL 98B

Rated current In	100 A	200 A	250 A	400 A	500 A	600 A
Frame size	F2	F2	F2	F3	F3	F3
Number of poles(s) in series per polarity - 1000VDC	2 P	2 P	2 P	2 P	2 P	2 P
Number of poles(s) in series per polarity - 1500VDC	2 P / 3 P	2 P / 3 P	2 P / 3 P	2 P	2 P	-
Number of pole(s) of the device - 1000VDC	2 P	2 P	2 P	2 P	2 P	2 P
Number of pole(s) of the device - 1500VDC	2 P / 3 P	2 P / 3 P	2 P / 3 P	2 P	2 P	-
Short-circuit capacity at 1000 & 1500VDC (with protection)						
Prospective short-circuit current (kA rms DC)	10 ⁽¹⁾	10 ⁽¹⁾	10 ⁽¹⁾	10 ⁽¹⁾	10 ⁽¹⁾	10 ⁽¹⁾
Mechanical characteristics						
Durability (number of operating cycles)	8 000	8 000	8 000	8 000 / 6 000 ⁽²⁾	8 000 / 6 000 ⁽²⁾	8 000 / 6 000 ⁽²⁾
Number of tripping operations	1 000	1 000	1 000	1 000	1 000	1 000
Power loss/pole (W/Pole)	2	5,1	11,2	13	21,6	29,3

(1) Without fuse during 50 ms.

(2) 8 000 for LBS without tripping function and 6 000 for LBS with tripping function.

Characteristics

Characteristics according to IEC 60947-3

Rated current In			160 A	250 A	315 A	400 A	630 A	800 A
Frame size			F2	F2	F2	F3	F3	F3
Thermal current at 40°C (A)			160	250	315	400	630	800
Thermal current at 50°C (A)			160	250	315	400	630	760
Thermal current at 60°C (A)			160	250	315	400	570	685
Rated insulation voltage U (V)			1500	1500	1500	1500	1500	1500
Rated impulse withstand voltage U _{imp} (kV)			12	12	12	12	12	12
Number of circuits	Rated voltage	Utilisation category	I _e (A)	I _e (A)	I _e (A)	I _e (A)	I _e (A)	I _e (A)
1 circuit	1000 VDC ⁽¹⁾	DC-21 B	160	250	315	400	630	800
1 circuit	1500 VDC ⁽²⁾	DC-21 B	160	250	315	400	630	-
Number of circuits	Rated voltage	Utilisation category	I _e (A)	I _e (A)	I _e (A)	I _e (A)	I _e (A)	I _e (A)
1 circuit	1000 VDC ⁽¹⁾	PV2	-	-	-	-	-	-
1 circuit	1500 VDC ⁽²⁾	PV2	160	250	315	400	630	-
2 circuits	1500 VDC ⁽²⁾	PV2	-	-	-	400	630	-
Short-circuit capacity at 1000 & 1500VDC (without protection)								
Rated short-time withstand current I _{cw} 1s (kA eff.)			5	5	5	8	8	8
Rated short-circuit making capacity I _{cm} (kA peak) - 60 ms			10	10	10	10	10	10
Connection								
Recommended Cu rigid cable cross-section (mm ²) ⁽³⁾			70	120	185	240	2 X 185	2X 240
Recommended Cu busbar width (mm) ⁽³⁾			20	20	20	25	25	25
Mechanical characteristics								
Durability (number of operating cycles)			8000	8000	8000	8000 / 6000 ⁽⁴⁾	8000 / 6000 ⁽⁴⁾	8000 / 6000 ⁽⁴⁾
Number of tripping operations			1000	1000	1000	1000	1000	1000
Power loss/pole (W/Pole)			4,5	11,2	13	13	30,2	50

(1) 2 poles in series.

(2) 2 or 3 poles in series.

(3) For aluminium connection, please consult us.

(4) 8000 for LBS without tripping function and 6000 for LBS with tripping function.


INOSYS LBS UL 98B

Load Break Switches for DC & PV applications


from 100 to 600 A, up to 1500 VDC,

with manual operation and manual operation with tripping function


INOSYS LBS without tripping function

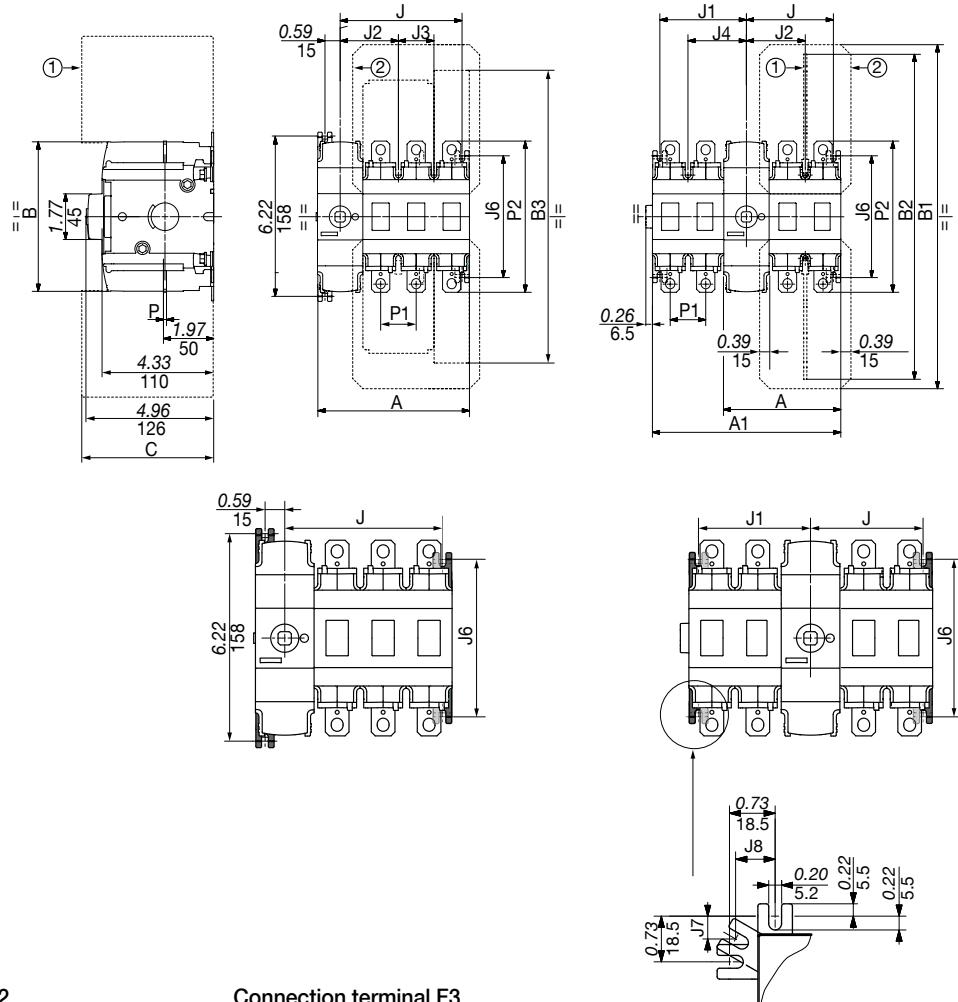

Connection terminal F2



Connection terminal F3




Rating (A)	Frame size	Units	A		A1		J		J1		J	
			2 P	3 P	1+1 P / 2+2 P	1+1 P / 2+2 P	1+1 P / 2+2 P	2 P	3 P	2 P	3 P	
100 ... 250	F2	in	4.60	5.98	4.60 / 7.36	1.97 / 3.37	2.05 / 3.44	3.35	4.72	2.05 / 3.44	3.35	
		mm	117	152	117 / 187	50.5 / 85.5	52.5 / 87.5	85.5	120.5			
400 ... 600	F3	in	5.40	7.17	5.40 / 8.94	2.36 / 4.15	2.44 / 4.23	4.13	-	62.5 / 107.5	105.5	
		mm	137	182	137 / 227	60.5 / 105.5	62.5 / 107.5	105.5	-			


Rating (A)	Frame size	Units	B	B1	B2		B3	C	IEC	UL	J2	J3	J4	J6	P1	P2
					IEC short	IEC long	UL									
100 ... 250	F2	in	5.90	13.35	7.85	12.61	10.31	11.64	4.33	4.33	2.26	1.38	2.34	4.72	1.38	5.87
		mm	154	339	199	320	262	296	110	110	57.5	35	59.5	120	35	149
400 ... 600	F3	in	5.90	16.28	9.35	14.11	15.5	14.12	4.33	5.31	2.64	1.77	2.72	6.22	1.77	7.87
		mm	154	414	237	358	394	359	110	135	67.5	45	69.5	158	45	200

Dimensions (in/mm)


INOSYS LBS with tripping function

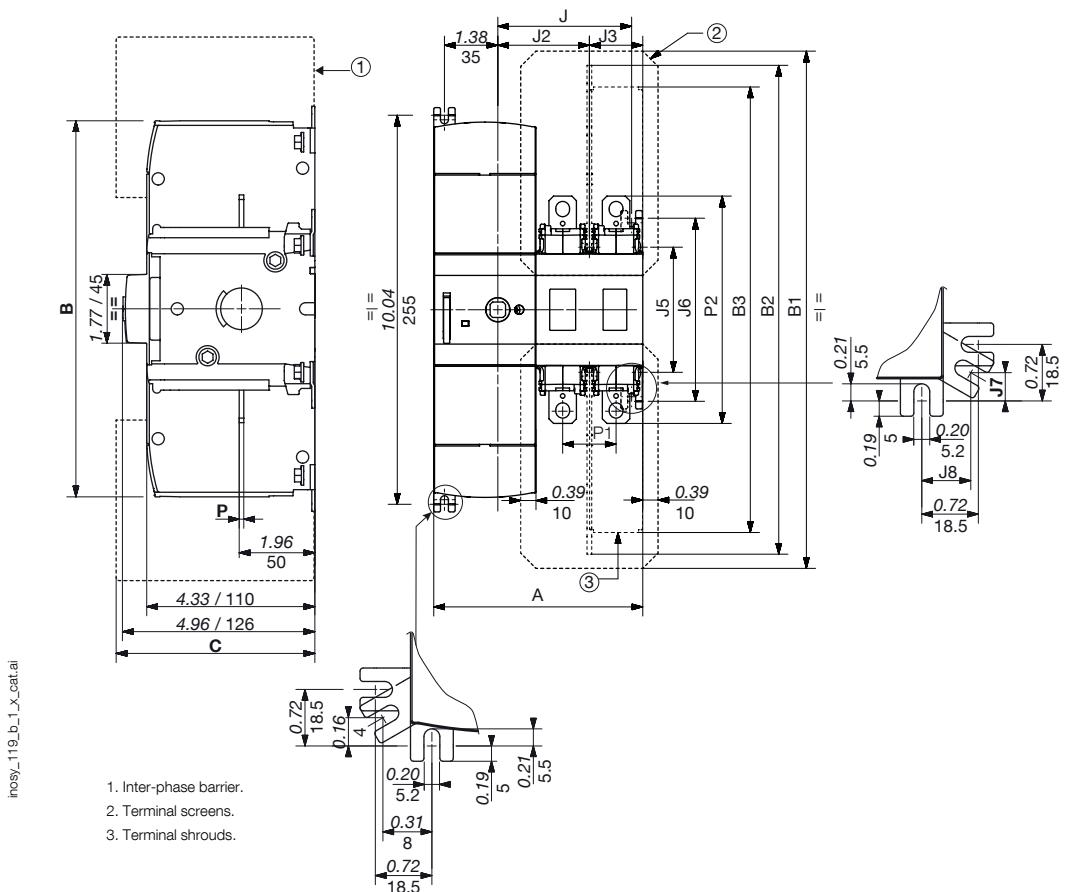


Connection terminal F2



Connection terminal F3



Parallel bridging F3

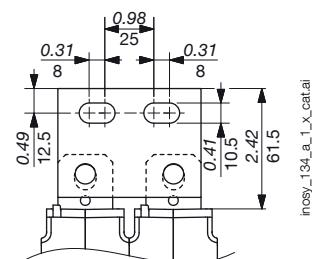

			A	
Rating (A)	Frame size	Units	2 P	3 P
100 ... 250	F2	in	5.39	6.77
		mm	137	172
400 ... 600	F3	in	6.18	-
		mm	157	-

Rating (A)	Frame size	Units	B	B1	B2	B3	C	J2	J3	J4	J5	J6	J7	J8	P	P1	P2
100 ... 250	F2	in	9.69	13.35	10.31	11.64	4.33	2.36	1.38	3.03	3.23	4.72	0.39	0.58	0.12	1.38	5.87
		mm	246	339	262	296	110	60	35	77	82	120	10	15	3	35	149
400 ... 600	F3	in	9.69	16.28	15.50	14.12	5.31	2.76	1.77	3.43	4.72	6.22	0.16	0.33	0.20	1.77	7.87
		mm	246	414	394	359	135	70	45	87	120	158	4	8	5	45	200

INOSYS LBS UL 98B

Load Break Switches for DC & PV applications

from 100 to 600 A, up to 1500 VDC,

with manual operation and manual operation with tripping function

Dimensions for external handles (in/mm)

F2 frame size

Handle type	Front operation Direction of operation	Door drilling
S2 type with trip	<p>Front operation Direction of operation</p> <p>The diagram shows a circular rotation range from 0° to 90°. The 'Trip' position is at 90°, indicated by a vertical line. The 'Reset' position is at 0°, indicated by a horizontal line.</p>	<p>Door drilling</p> <p>Dimensions: 1.10/28, 4 Ø 0.28, 4 Ø 7, Ø 1.46, Ø 37, 1.57, 40.</p>
S2 type	<p>Front operation Direction of operation</p> <p>The diagram shows a circular rotation range from 0° to 90°. The 'Trip' position is at 90°, indicated by a vertical line. The 'Reset' position is at 0°, indicated by a horizontal line.</p>	<p>Door drilling</p> <p>Dimensions: 1.10/28, 4 Ø 0.28, 4 Ø 7, Ø 1.46, Ø 37, 1.57, 40.</p>

poign_067_b_1_us_cat.eps

poign_013_b_1_us_cat.eps

F3 frame size

Handle type	Front operation Direction of operation	Door drilling
S2L type with trip	<p>Front operation Direction of operation</p> <p>The diagram shows a circular rotation range from 0° to 90°. The 'Trip' position is at 90°, indicated by a vertical line. The 'Reset' position is at 0°, indicated by a horizontal line.</p>	<p>Door drilling</p> <p>Dimensions: 1.10/28, 4 Ø 0.28, 4 Ø 7, Ø 1.46, Ø 37, 1.57, 40.</p>
S2L type	<p>Front operation Direction of operation</p> <p>The diagram shows a circular rotation range from 0° to 90°. The 'Trip' position is at 90°, indicated by a vertical line. The 'Reset' position is at 0°, indicated by a horizontal line.</p>	<p>Door drilling</p> <p>Dimensions: 1.10/28, 4 Ø 0.28, 4 Ø 7, Ø 1.46, Ø 37, 1.57, 40.</p>

poign_068_b_1_us_cat.eps

poign_069_b_1_us_cat.eps

Pole series connections


1 PV circuit - 1000 & 1500 VDC

1 PV circuit - 1500 VDC


2 PV circuits - 1500 VDC

F2-F3 - 2 P

Grounded network

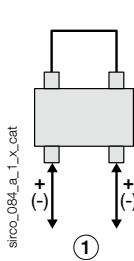


Floating network

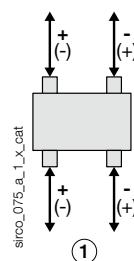


F2 - 3 P

Grounded network

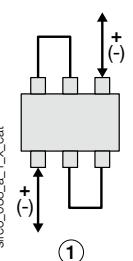


Floating network

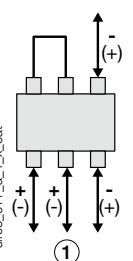


F3 - 2 P

Grounded network

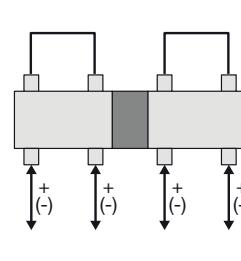

Floating network

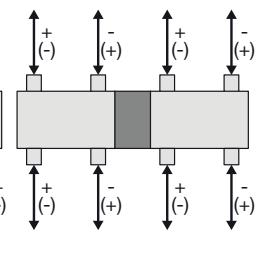


Bridging bars (in/mm)


F2

8409 0016⁽¹⁾

(1) Kit comprises 2 identical bars.

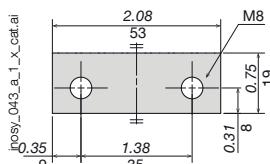


8409 0025

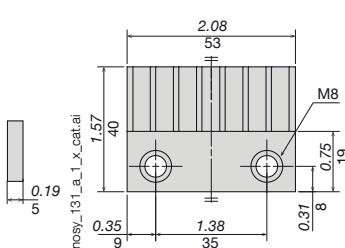

F3



8409 0040⁽¹⁾

(1) Kit comprises 2 identical bars.


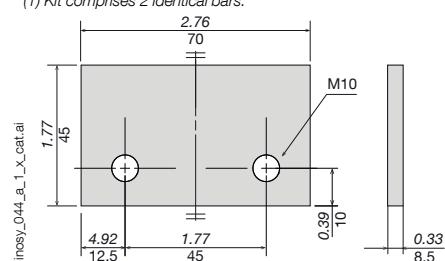


F3

8409 0041

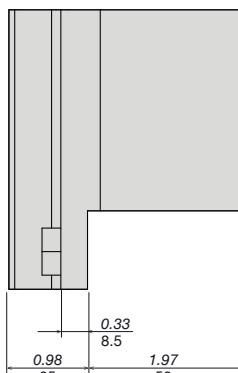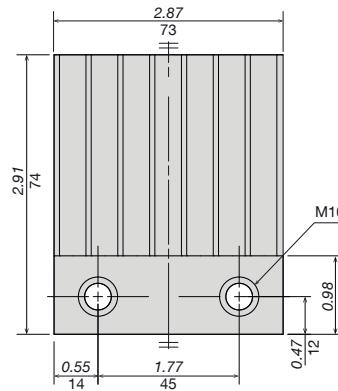

8409 0063



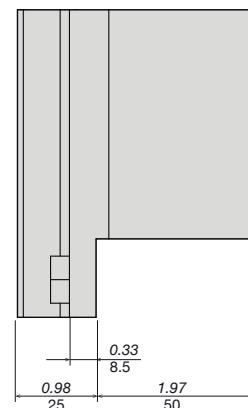
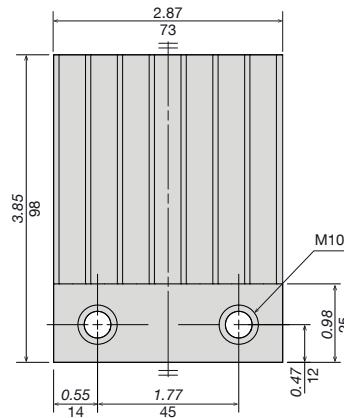


inosy_016_a_1x.cat.ai

Mounting orientation

F2 - F3

All mounting orientations are possible. Derating may apply - please consult us.



(1) Not UL certified with jumpers 8409 0025

Note

Maquette : SOCOME
Réalisation : SOCOME
Photographie : Martin Bernhart et Studio Objectif
Impression : Gyss Imprimeur - 17 rue du Thal - 67211 Obernai

Socomec: our innovations supporting your energy performance

1 independent manufacturer

3,600 employees
worldwide

10 % of sales revenue
dedicated to R&D

400 experts
dedicated to service provision

Your power management expert



POWER
SWITCHING



POWER
MONITORING



POWER
CONVERSION



ENERGY
STORAGE



EXPERT
SERVICES

The specialist for critical applications

- Control, command of LV facilities
- Safety of persons and assets
- Measurement of electrical parameters
- Energy management
- Energy quality
- Energy availability
- Energy storage
- Prevention and repairs
- Measurement and analysis
- Optimisation
- Consultancy, commissioning and training

A worldwide presence

12 production sites

- France (x3)
- Italy (x2)
- Tunisia
- India
- China (x2)
- USA (x3)

28 subsidiaries and commercial locations

- Algeria • Australia • Belgium • China • Canada
- Dubai (United Arab Emirates) • France • Germany
- India • Indonesia • Italy • Ivory Coast • Netherlands
- Poland • Portugal • Romania • Singapore, Slovenia
- South Africa • Spain • Switzerland • Thailand
- Tunisia, Turkey • UK • USA

80 countries

where our brand is distributed

HEAD OFFICE

SOCOMECA GROUP

SAS SOCOMEC capital 10633 100 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex
Tel. +33 3 88 57 41 41 - Fax +33 3 88 57 78 78
info.scp.isd@socomec.com

www.socomec.com



ENERGY
SPECIALIST
1922

socomec
Innovative Power Solutions