Puesta en servicio

Sistema de alimentación ininterrumpida (SAI) monofásico y trifásico

La puesta en marcha de un SAI cubre el arranque del equipo, la verificación de su funcionamiento de conformidad con las especificaciones del diseño y la comprobación de su compatibilidad con el entorno de trabajo del cliente.

Socomec realiza el servicio de puesta en marcha dentro del marco de una norma de procesos de calidad asegurándose de que su equipo se entrega en un estado seguro, fiable y operativo.

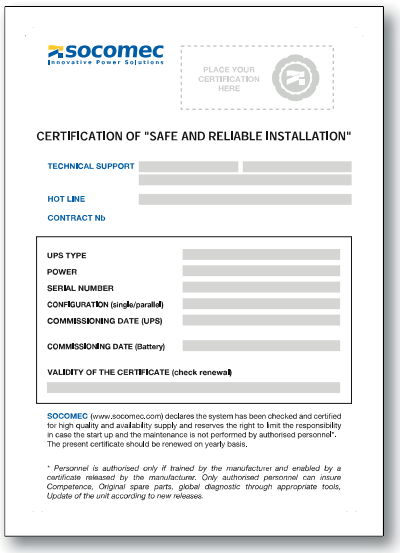

socomec
Innovative Power Solutions

PLACE YOUR CERTIFICATION HERE

CERTIFICATION OF "SAFE AND RELIABLE INSTALLATION"

TECHNICAL SUPPORT

HOT LINE

CONTRACT Nb

UPS TYPE
POWER
SERIAL NUMBER
CONFIGURATION (single/parallel)
COMMISSIONING DATE (UPS)

COMMISSIONING DATE (Battery)

VALIDITY OF THE CERTIFICATE (check renewal)

SOCOMEC (www.socomec.com) declares the system has been checked and certified to high quality and availability supply and reserves the right to limit the responsibility in case the start up and the maintenance is not performed by authorised personnel*.
The present certificate should be renewed on yearly basis.

* *Personnel is authorised only if trained by the manufacturer and enabled by a certificate released by the manufacturer. Only authorised personnel can insure Competence, Original spare parts, global diagnostic through appropriate tools, Update of the unit according to new releases.*

Puntos clave

- Inspección del entorno de trabajo
- Comprobación de la instalación eléctrica (interruptor-seccionador, cableado, interruptores automáticos, etc.)
- Revisión interna y externa del SAI
- Puesta en marcha y configuración del sistema
- Prueba de funcionamiento en un solo SAI o sistema paralelo
- Prueba de banco de carga (bajo pedido)

Ventajas

- Cumplimiento de las diferentes normas sobre instalaciones
- Completa la prueba de aceptación de fábrica
- Puesta en marcha de la trazabilidad
- Certificado de conformidad

Precio especial contrato

Precio especial para el contrato de mantenimiento si se firma dentro de los seis meses posteriores a la puesta en marcha.

socomec
Innovative Power Solutions